




### AIR 101 II 600 WH

Cod. 02011179

EAN 8422248109864

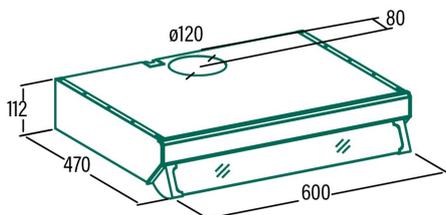

#### GENERAL INFORMATION

EAN/UPC	8422248109864
Subfamily	Conventional

#### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	44,7
EEL class (energy efficiency class)	C
FDE (fluid dynamic efficiency)	9,2
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (lux/W)	27,3
LE class (light efficiency class)	B
GFE (grease filtering efficiency)	67,7
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m3/h)	110
Airflow in normal mode MAX (m3/h)	205
Acoustic power in normal mode MIN (dB)	56
Acoustic power in normal mode MAX (dB)	68
Ps (energy consumption in standby mode) (W)	0

#### Integration directive EU 66/2014

f (time increase factor)	1,7
EEL (Energy Efficiency Index)	82,2
QBEP (maximum efficiency at air flow point) (m3/h)	105,2
PBEP (maximum efficiency at pressure point) (Pa)	209
WBEP (power consumption at maximum efficiency) (W)	201
WL (nominal power lighting system) (W)	5,5
EMIDDLE (Average illuminance on the cooking surface) (lux)	150

#### External Dimensions

Diamètre de sortie (mm)	120
-------------------------	-----

#### Characteristics

Motor quantity	1
Motor model	L1N
Maximum pressure (Pa)	325
Filter technology	Aluminium mesh
Control technology	Mechanical slider
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

#### Lighting

Light model	LED E-14
Ray technology	LED

#### Installation

Recirculation option	√
Charcoal filter	-
Back draught shutter	No
Inner shield	-

#### Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	70,5
Electric shock protection	Class I
Power cord length (m)	0,7
Plug type	No plug

#### Accessories

Back draught shutter	02849002
Activated charcoal filter	02846764

