Apelson

TELESCOPIC EXTRACTOR **HOODS**

# AIR 202 600 INOX

Cod. **02034380** EAN **8422248377997**

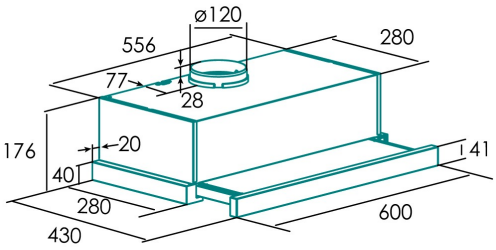


## GENERAL INFORMATION

| | |
|---|---|
| EAN/UPC | 8422248377997 |
| Subfamily | Telescopic |

## Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|---|
| AEC (Annual energy consumption) (kWh/year) | 60,9 |
| EEI class (energy efficiency class) | C |
| FDE (fluid dynamic efficiency) | 9,8 |
| FDE class (fluid dynamic efficiency class) | E |
| LE (light efficiency) (lux/W) | 50 |
| LE class (light efficiency class) | A |
| GFE (grease filtering efficiency) | 56,1 |
| GFE class (grease filtering efficiency class) | E |
| Airflow in normal mode MIN (m3/h) | 203,6 |
| Airflow in normal mode MAX (m3/h) | 387,6 |
| Acoustic power in normal mode MIN (dB) | 57 |
| Acoustic power in normal mode MAX (dB) | 69 |
| Po (energy consumption in off mode) (W) | 0 |

## Integration directive EU 66/2014

| | |
|---|---|
| *f* (time increase factor) | 1,6 |
| EEI (Energy Efficiency Index) | 84,1 |
| QBEP (maximum efficiency at air flow point) (m3/h) | 222,8 |
| PBEP (maximum efficiency at pressure point) (Pa) | 162 |
| WBEP (power consumption at maximum efficiency) (W) | 101,8 |
| WL (nominal power lighting system) (W) | 2 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 100 |

## External Dimensions

| | |
|---|---|
| Width (mm) | 600 |
| Depth (mm) | 176 |
| Maximum total height (mm) | 430 |
| Minimum total height (mm) | 280 |
| Diamètre de sortie (mm) | 120 |

## Characteristics

| | |
|---|---|
| Motor quantity | 2 |
| Motor model | AC 65 |
| Maximum pressure (Pa) | 269,3 |
| Free out airflow (m3/h) | 380 |
| Control technology | Mechanical rocker switch |
| Booster | - |
| Power levels | 2 |
| Timer | - |
| Filter saturation indicator | - |
| Charcoal filter replacement indicator | - |
| Dimmer function | - |
| Connectivity | - |
| Remote control | - |
| Display | - |

## Lighting

| | |
|---|---|
| Light model | CSLED |
| Ray technology | LED |

## Installation

| | |
|---|---|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm) | 650 |
| Recirculation option | √ |
| Charcoal filter | - |
| Back draught shutter | Included |
| Inner shield | - |

## Electric connection

| | |
|---|---|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50 |
| Nominal input power (W) | 120 |
| Electric shock protection | Class II |

| | |
|---|---|
| Power cord length (m) | 120 |

## Accessories

| | |
|---|---|
| Upper decorative duct extension | No |
| White decorative duct | No |
| Black decorative duct | No |
| Island tube booster | No |
| Back draught shutter | No |
| MAX PRO Metal filter | No |
| Activated charcoal filter | 02800959 |