



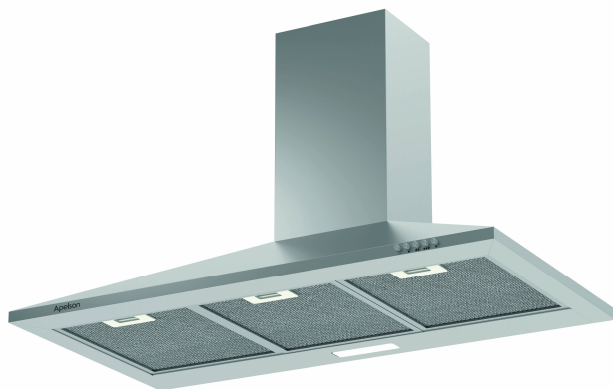

HELIA 901 X

Cod. 02063379

EAN 8422248371681

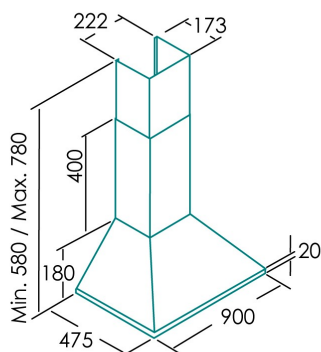

GENERAL INFORMATION

EAN/UPC	8422248371681
Subfamily	Chimney

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	17,9
FDE (fluid dynamic efficiency)	29,7
LE (light efficiency) (lux/W)	20
GFE (grease filtering efficiency)	75,3
Airflow in normal mode MIN (m3/h)	220
Airflow in normal mode MAX (m3/h)	610
Acoustic power in normal mode MIN (dB)	50
Acoustic power in normal mode MAX (dB)	73
Po (energy consumption in off mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	0,9
EEL (Energy Efficiency Index)	41,5
QBEP (maximum efficiency at air flow point) (m3/h)	228,9
PBEP (maximum efficiency at pressure point) (Pa)	222
WBEP (power consumption at maximum efficiency) (W)	47,5
WL (nominal power lighting system) (W)	3,1
EMIDDLE (Average illuminance on the cooking surface) (lux)	62,25

External Dimensions

Width (mm)	510
Depth (mm)	302
Maximum total height (mm)	170
Minimum total height (mm)	170
Diamètre de sortie (mm)	120

Characteristics

Motor quantity	1
Motor model	AC 65
Filter technology	Aluminium mesh
Control technology	Mechanical push button
Booster	-
Power levels	2
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	-
Remote control	-
Display	-

Lighting

Light model	CSLED
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650
Recirculation option	-
Charcoal filter	✓
Back draught shutter	-
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Plug type	No plug

Accessories

Upper decorative duct extension	No
White decorative duct	No
Black decorative duct	No
Island tube booster	No

Back draught shutter	No
MAX PRO Metal filter	No
Activated charcoal filter	No
Noiseless flexible duct	No
Recirculation kit	Optional