


Apelson

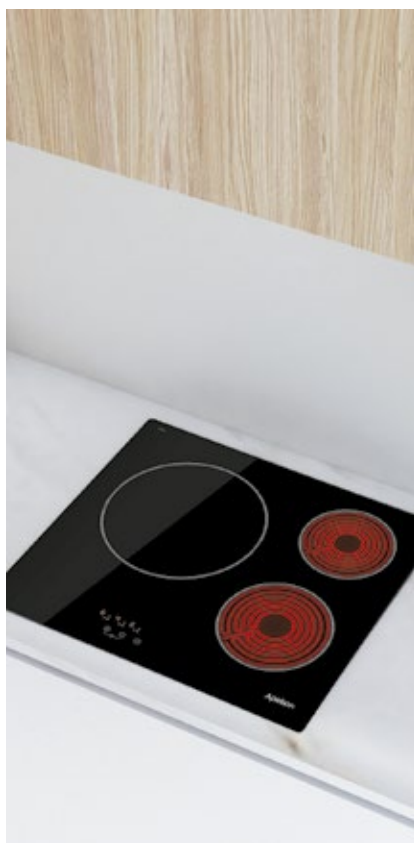

2025
GENERAL CATALOGUE

Apelson

The technical characteristics indicated in the catalogue must be verified by the **THE MANUFACTURER**.

Non-contractual photographs.

CATA Electrodomésticos S.L.U. reserves the right to modify the characteristics of its products without prior notice.

© Design, layout, images and content are the property of **CATA Electrodomésticos S.L.U.**

HOODS 4-7

HOBBS 8-11

OVENS & MICROWAVES 12-13

DISHWASHERS 14

WASHERS 14

FRIDGES 15

SINKS 16-17

TAPS 18

HOODS

T-SHAPE

TALIA 901 X p.4




TALIA 601 X p.4



PYRAMIDAL

HELIA 901 X p.5



HELIA 601 X p.5



HOODS

TELESCOPIC

AIR 202 p.6



AIR 201 p.6



CONVENTIONAL

AIR 102 II p.7



AIR 101 II p.7



FLOW-IN


AAS 600 p.8



HOBS

INDUCTION

AIT 4600 p.9



AIT 3602 p.9



AIT 3601 p.10



HOBS

VITROCERAMIC

AVT 4601 p.10



AVT 3600 p.11



AVT 2300 p.11



OVENS AND MICROWAVES

MULTIFUNCTION

AMM 5001 X p.12



STATIC

AMS 5001X p.12



MICROWAVE

AMW 2000G X p.13



DISHWASHER

FREESTANDING

ALV-6000 WH p.14



WASHING

FREESTANDING

AWM 6000 WH p.14



COOLING

FREESTANDING

AFC 1800 WH p.15



SINKS

TOP MOUNT

ACE 34R p.16



ARC 38 p.17



ACC 40 p.17



TAPS

HIGH SPOUT

AGA p.18



LOW SPOUT

AGB p.18



HOODS



T-SHAPE


TALIA 901 X

NEW

COD	EAN	FINISH
02029380	8422248378086	Steel



- Mechanical Control Panel
- 3 extraction levels
- Extraction power : 299m3/h - 223m3/h
- Motor maximum airflow free outlet: 390 m3/h
- Sound power: 61dB(A), máximo: 68dB(A)
- Maximum energy consumption 67W
- High efficiency Compact Strip LED, 2W
- Easy installation system
- Dishwasher-safe filters
- Stainless steel finish
- Maximum pressure: 182 Pa
- 150mm outlet
- Energy efficiency class: B

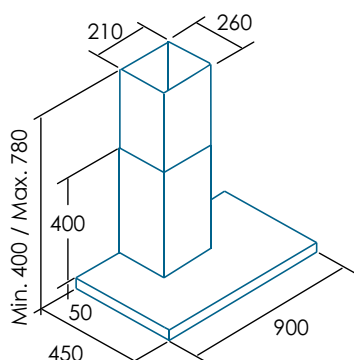

T-SHAPE


TALIA 601 X

NEW

COD	EAN	FINISH
02029381	8422248378093	Steel



- Mechanical Control Panel
- 3 extraction levels
- Extraction power : 301m3/h - 230m3/h
- Motor maximum airflow free outlet: 390 m3/h
- Sound power : 60dB(A), máximo: 67dB(A)
- Maximum energy consumption 67W
- High efficiency Compact Strip LED, 2W
- Easy installation system
- Dishwasher-safe filters
- Stainless steel finish
- Maximum pressure: 182 Pa
- 150mm outlet
- Energy efficiency class: B

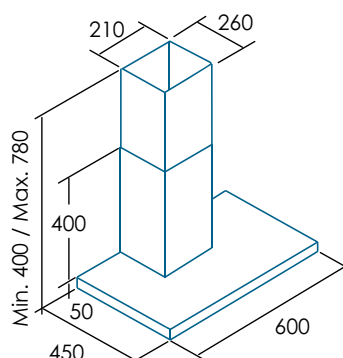

HOODS



PYRAMIDAL


HELIA 901 X

NEW

COD	EAN	FINISH
02063379	8422248371681	Steel



- Mechanical Control Panel
- 3 extraction levels
- Extraction power: 610m3/h - 220m3/h
- Motor maximum airflow free outlet: 800 m3/h
- Sound power : 50dB(A), máximo: 73dB(A)
- Maximum energy consumption 111,5W
- High efficiency Compact Strip LED, 1,5W
- Easy installation system
- Dishwasher-safe filters
- Stainless steel finish
- Maximum pressure: 411 Pa
- 150mm outlet
- Energy efficiency class: A+

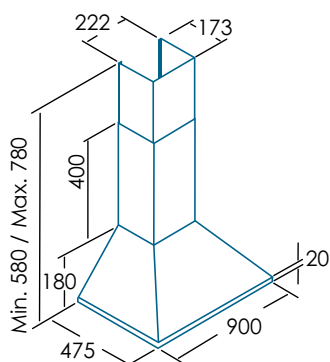

PYRAMIDAL


HELIA 601 X

NEW

COD	EAN	FINISH
02061379	8422248372077	Steel



- Mechanical Control Panel
- 3 extraction levels
- Extraction power: 610m3/h - 220m3/h
- Motor maximum airflow free outlet: 800 m3/h
- Sound power : 50dB(A), máximo: 73dB(A)
- Maximum energy consumption 111,5W
- High efficiency Compact Strip LED, 1,5W
- Easy installation system
- Dishwasher-safe filters
- Stainless steel finish
- Maximum pressure: 411 Pa
- 150mm outlet
- Energy efficiency class: A+

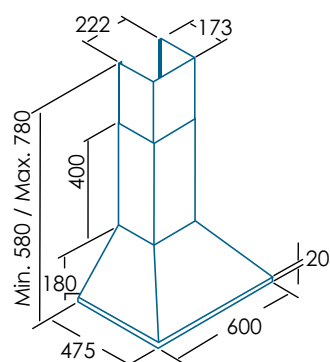

HOODS



TELESCOPIC


AIR 202 600 INOX

NEW

COD	EAN	FINISH
02034380	8422248377997	Steel



- Rocker switch
- 2 extraction levels
- Extraction power: 387m³/h - 203m³/h
- Motor maximum airflow free outlet: 500 m³/h
- Sound power : 57dB(A), máximo: 69dB(A)
- 2 motors Maximum energy consumption 122W
- High efficiency Compact Strip LED, 2W
- Easy installation system
- Dishwasher-safe filters
- Stainless steel finish
- Maximum pressure: 269 Pa
- 120mm outlet
- Energy efficiency class: C

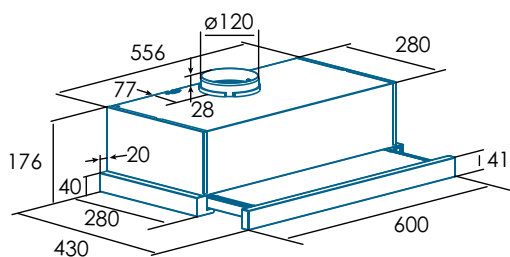

TELESCOPIC


AIR 201 600 BLANCA

NEW

COD	EAN	FINISH
02034381	8422248378000	white



- Rocker switch
- 2 extraction levels
- Extraction power 213m³/h - 101m³/h
- Motor maximum airflow free outlet: 280 m³/h
- Sound power : 46dB(A), máximo: 64dB(A)
- Maximum energy consumption 62W
- High efficiency Compact Strip LED, 2W
- Easy installation system
- Dishwasher-safe filters
- White finish
- Maximum pressure: 249 Pa
- 120mm outlet
- Energy efficiency class: C

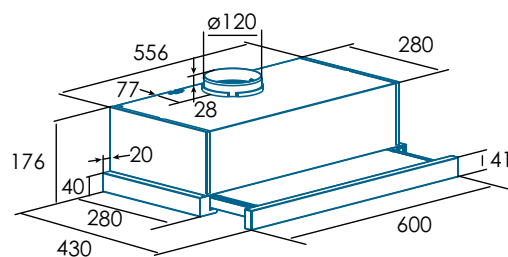

HOODS




CONVENTIONAL

AIR 102 II

COD	EAN	FINISH
02013179	8422248109895	Steel



- Sliding Control Panel
- 3 extraction levels
- Extraction power: 320m³/h - 195m³/h
- Sound power: 60dB(A), maximum: 67dB(A)
- 2 L1 motors. Maximum energy consumption 110W
- E-14 LED lighting, 2x5.5W
- Easy installation system
- Dishwasher-safe filters
- White finish
- 120mm outlet
- Energy efficiency class: D

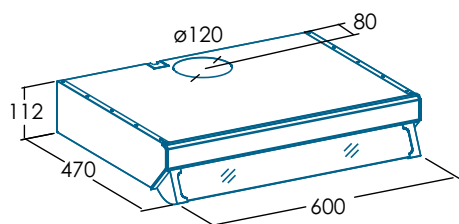


CONVENTIONAL

AIR 101 II


COD	EAN	FINISH
02011179	8422248109864	Steel



- Sliding Control Panel
- 3 extraction levels
- Extraction power 205m³/h - 110m³/h
- Sound power: 56dB(A), maximum: 68dB(A)
- L1N motor. Maximum energy consumption 70.5W
- E-14 LED lighting, 5,5W
- Easy installation system
- Dishwasher-safe filters
- White finish
- Outlet: 120 mm
- Energy efficiency class: C

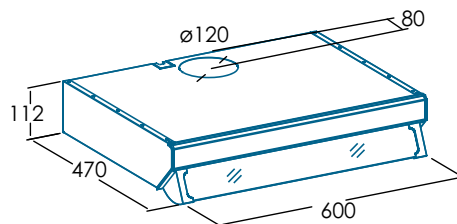

FLOW-IN

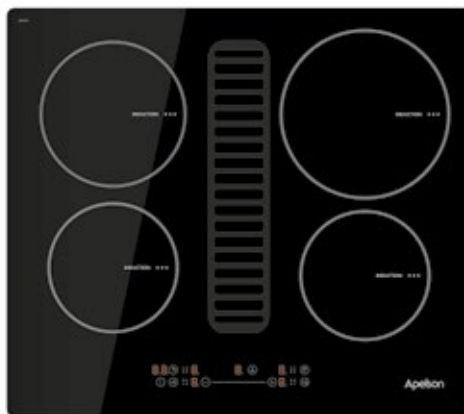

FLOW-IN

AAS 600


NEW

COD	EAN	FINISH
08000278	8422248358712	Rounded



- Slider Control Panel with timer and cleaning filters indicator
- 6 extraction levels, 5 + 1 TURBO
- Extraction power : 673m3/h - 238m3/h
- Sound power : 51dB(A), maximum: 68dB(A)
- BRUSHLESS motor. Ultra silent. Maximum energy consumption 165W
- Airflow speed: 10 m/s
- Easy-to-install system
- Dishwasher-washable filters
- Max. pressure: 644 Pa - TURBO pressure: 870 Pa
- 220x90 mm outlet diameter
- Energy Class: A+

- 4 cooking areas:
 - Front Right: 1 area with Booster function of $\varnothing 160\text{mm}$ of 1.2kW (máx. 1.5kW)
 - Rear Right: 1 area with Booster function of 215 of 2.3 kW (max. 2.6kW)
 - Front Left: 1 area with Booster function of $\varnothing 160\text{mm}$ of 1.2kW (máx. 1.5kW)
 - Rear Left: 1 area with Booster function of $\varnothing 180\text{mm}$ of 1.8kW (máx. 2.3kW)
- Continuous power regulation
- Slider Touch control panel
- It has three temperature functions:
 - Melting / Defrosting (45-55°C)
 - Heating / Keeping warm (65-70°C)
 - Simmering (85-95°C)
- 9 adjustable power levels + Booster
- AUTO cooking function
- Timer function for each area
- Countdown alarm
- Automatic pan detection
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Pause Function

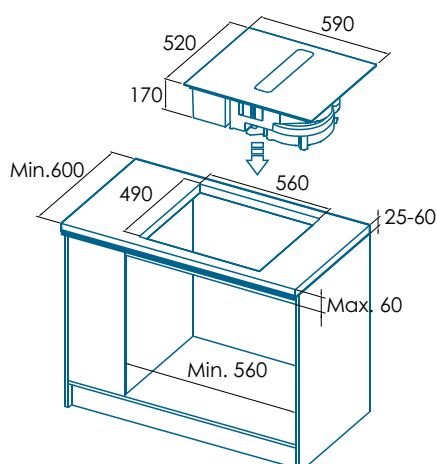

HOBS



INDUCTION


AIT 4600

NEW

COD	EAN	FINISH
08074180	8422248372374	Rounded



- 4 cooking areas:
 - Front Right: 1 area with Booster function of Ø160mm of 1.2kW
 - Rear Right: 1 area with Booster function of Ø180mm of 1.8kW
 - Front Left: 1 area with Booster function of Ø160mm of 1.2kW
 - Rear Left: 1 area with Booster function of Ø180mm de 1.8kW
- Touch Control with acoustic warning
- It has three temperature functions:
 - Melting / Defrosting (45-55°C)
 - Heating / Keeping warm (65-70°C)
 - Simmering (85-95°C)
- 9 niveles de potencia regulables + Booster
- Timer function for each area
- Automatic pan detection
- Power management. Max. power 7kW
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Pause Function

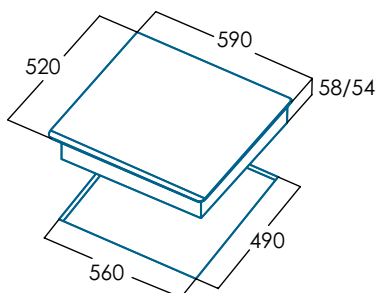

INDUCTION


AIT 3602

NEW


COD	EAN	FINISH
08063115	8422248351416	Rounded



- 3 cooking areas:
 - Front Left: 1 area with Booster function of Ø210mm of 2kW
 - Rear Left: 1 area with Booster function of Ø160mm of 1.2kW
 - Right: 1 area with Booster function of Ø280mm of 2.3kW
- Touch Control with acoustic warning
- It has three temperature functions:
 - Melting / Defrosting (45-55°C)
 - Heating / Keeping warm (65-70°C)
 - Simmering (85-95°C)
- 9 niveles de potencia regulables + Booster
- Timer function for each area
- Countdown alarm
- Automatic pan detection
- Power management. Max. power 5.8kW
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Pause Function

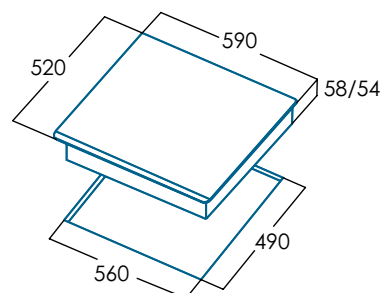

HOBS

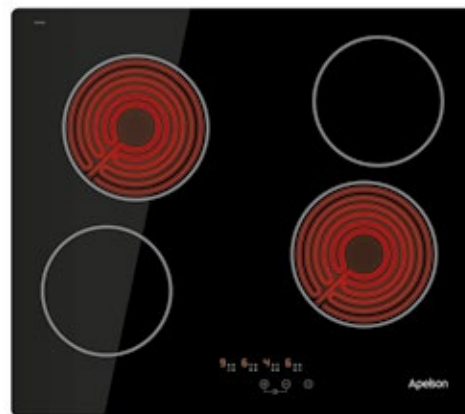

INDUCTION


AIT 3601

NEW

COD	EAN	FINISH
08076080	8422248372367	Rounded



- 3 cooking areas:
 - Front Left: 1 area of Ø180mm of 1.8kW
 - Rear Left: 1 area of Ø160mm of 1.5kW
 - Right: 1 area with Booster function of ø250mm of 1.8kw
- Touch Control with acoustic warning
- It has three temperature functions:
 - Melting/Defrosting (45-55°C)
 - Heating/Keeping warm (65-70°C)
 - Simmering (85-95°C)
- 9 niveles de potencia regulables + Booster
- Timer function for each area
- Power management. Max. power 5.3kW
- Countdown alarm
- Automatic pan detection
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Pause Function
-

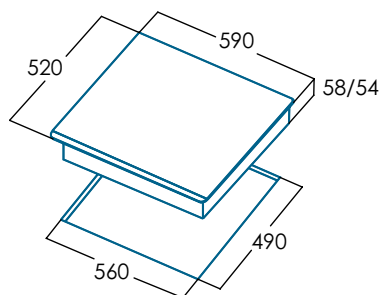

VITROCERAMIC


AVT 4601

NEW


COD	EAN	FINISH
08040080	8422248372381	Rounded



- 4 High Light cooking areas:
 - Front Right: 1 area of ø180mm of 1.8kW
 - Rear Right: 1 area of ø140mm of 1.2kW
 - Front Left: 1 area of ø140mm of 1.2kW
 - Rear Left: 1 area of ø180mm of 1.8kW
- Touch Control with acoustic warning
- 9 adjustable power levels
- Timer function for each area
- Automatic safety switch-off
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- 59 cm wide
- Total power 6kW

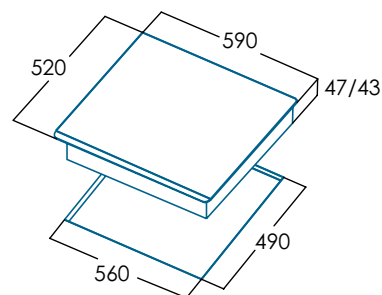

HOBS

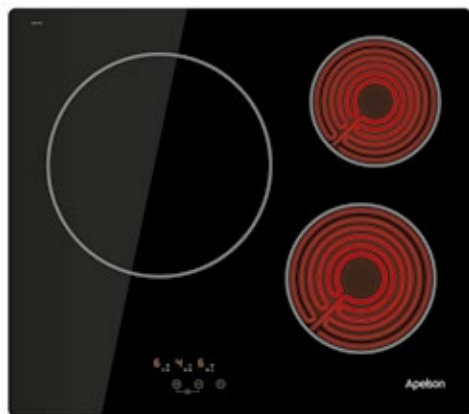

VITROCERAMIC


AVT 3600

NEW

COD	EAN	FINISH
08063180	8422248372398	Rounded



- 3 High Light cooking areas:
 - Front Right: 1 area of $\varnothing 185\text{mm}$ of 1.8kW
 - Rear Right: 1 area of $\varnothing 160\text{mm}$ of 1.2kW
 - Left: 1 giant double area of $\varnothing 280\text{mm}$ of 2.4kW
- Touch Control with acoustic warning
- 9 adjustable power levels
- Timer function for each area
- Automatic safety switch-off
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Total power 5.4kW

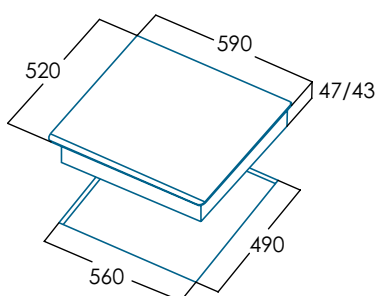

VITROCERAMIC


AVT 2300

NEW

COD	EAN	FINISH
08040180	8422248372404	Rounded



- 2 High Light cooking areas:
 - Front: 1 area of $\varnothing 165\text{mm}$ of 1.2kW
 - Rear: 1 double area of $\varnothing 190/150\text{mm}$ of 2/1kW
- Touch Control with acoustic warning
- 9 adjustable power levels
- Timer function for each area
- Automatic safety switch-off
- Safety lock
- Residual heat indicator
- Automatic safety switch-off
- Total power 3.2kW



OVENS



MULTIFUNCTION


AMM 5001 X

NEW

COD	EAN	FINISH
07001408	8422248376242	Steel



- Multifunction oven - 8 functions
- Functions: Defrosting; Large Area Grill + Hot Air; Large Area Grill; Grill; Eco; Bake + Hot Air; Bake; Wood-fired Oven
- Mechanical cooking programmer with automatic stop
- Temperature range 50°C-250°C
- Chromed support with 5 cooking levels
- Chromed supports
- Panoramic easy-to-clean full glass door with removable inner glass
- Glazed cool door with tangential ventilation 3 glasses
- Accessories: Deep tray and grid
- Easy to clean enamel
- Interior lighting
- Stainless steel and black glass finishing
- Net capacity 73 liters
- 220/240V 50/60Hz
- Energy Class A

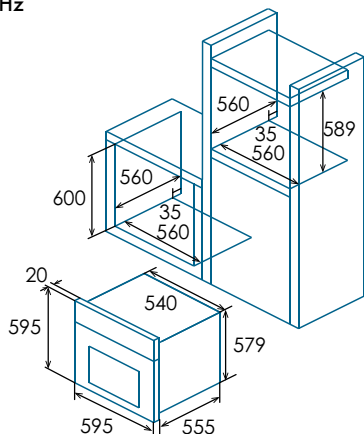

STATIC


AMS 5001 X

NEW

COD	EAN	FINISH
07001406	8422248376211	Steel



- Static oven - 6 functions
- Functions: Grill; Large Area Grill; Bake, Bakery, ECO
- Mechanical cooking programmer with automatic stop
- Temperature range 50°C-250°C
- 5 cooking levels
- Embedded supports
- Panoramic easy-to-clean full glass door with removable inner glass
- Glazed cool door with tangential ventilation 3 glasses
- Accessories: Deep tray and grid
- Easy to clean enamel
- Interior lighting
- Stainless steel and black glass finishing
- Net capacity 76 liters
- 220/240V 50/60Hz
- Energy Class A

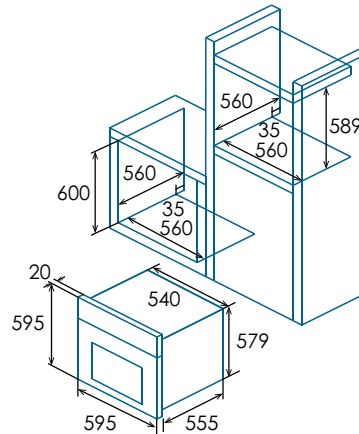

MICROWAVES



MICROWAVE


AMW 2000G X

NEW

COD	EAN	FINISH
07510314	8422248376259	Steel



- 20-litre built-in microwave with frame
- Combined Microwave + Grill operation
- Simultaneous grill 800W / Quartz grill
- 5 power levels, 700W output
- Heating power selector with 5 levels
- 1 grill power level
- 3 combination functions
- Timer from 0 to 30 minutes
- Defrost by time and weight
- Suitable for installation in a 60 cm wide tall unit/column
- Height-adjustable for furniture alignment
- Interior LED lighting
- Left side opening
- Easy installation
- Anti-tip safety system
- Ø245 mm revolving dish and grill rack

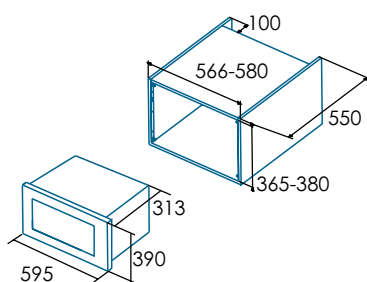

DISHWASHER



FREESTANDING


ALV-6000 WH

NEW

COD	EAN	FINISH
07200082	8422248376129	White



- Freestanding dishwasher for 12 place settings, 60 cm wide
- Energy efficiency class: E
- Water consumption: 11 litres per cycle
- Noise level: 52 dB(A)
- Triple safety system: AquaControl, overheating, and overflow protection
- 4 programs
- Special programs: Express 90' and Quick 30'
- Functions: Delayed start (3, 6, or 9 hours) and child safety lock
- Special functions: Half load, Pause
- Smart Inox cavity
- Suitable for all-in-one tablets
- LED indicators: programs, salt, and rinse aid

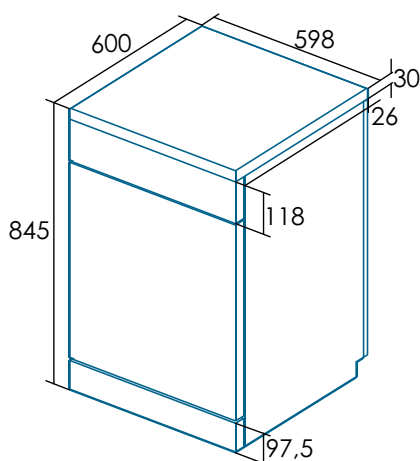

WASHING



FREESTANDING


AWM 6000 WH

NEW

COD	EAN	FINISH
07900006	8422248376204	White



- Freestanding front-loading washing machine
- Capacity: 1 to 6 kg
- Maximum spin speed: 1,000 rpm
- Energy efficiency class: E
- Child safety lock and door lock during operation
- 15 programs, including 12 washing programs
- Special drum cleaning function
- Special programs: 15-min quick wash, mixed fabrics, baby clothes, sportswear, and duvet
- Function selector: delayed start up to 12 hours, prewash, and extra rinse

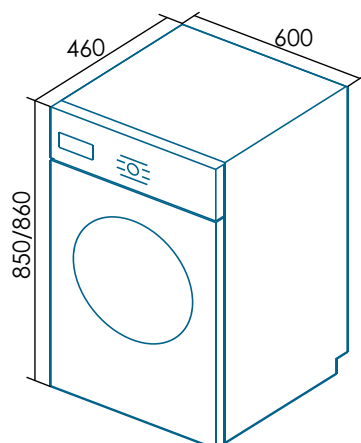

COOLING



FREESTANDING


AFC 1800 WH

NEW

COD	EAN	FINISH
07800081	8422248376136	White



- 1.80 m TOTAL No Frost combi refrigerator
- Energy efficiency class: E
- Even cooling in fridge and freezer compartments
- Independent electronic temperature control for fridge and freezer
- Fridge: 1 Fresh Box drawer
- Freezer: 2 large-capacity drawers and 1 independent tray
- Integrated door handle
- Net capacity (L): 253 (182 + 71)
- Energy consumption: 220 kWh/year
- Climate class N/T (16–38°C)
- LED lighting
- Reversible doors

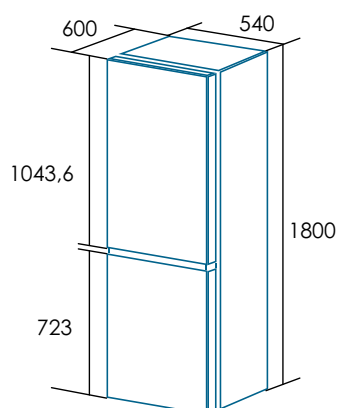

TAP



HIGH SPOUT


ACE 34R

NEW

COD	EAN	ACABADO
02625028	8422248376143	Steel



- Square bowl with reversible drainer
- Suitable for 45 cm base unit
- Dimensions: 76 x 43.5 cm
- Bowl depth: 15 cm
- Sound-absorbing base
- AISI 304 18/10 stainless steel
- 3 1/2" basket strainer waste
- Thickness: 0.5 mm
- Accessories:
 - Sealing tape
 - Fixing clips
 - Overflow pipe
 - Siphon

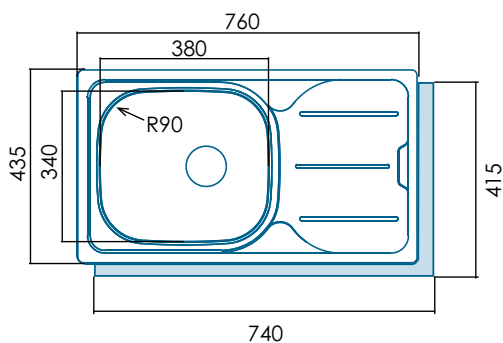

TAP



HIGH SPOUT

ARC 38


NEW

COD	EAN	FINISH
02602101	8422248376150	Steel



- Round bowl
- Suitable for 45 cm base unit
- Dimensions: Ø48.5 cm
- Bowl depth: 16 cm
- Sound-absorbing base
- AISI 304 18/8 stainless steel
- 3 1/2" basket strainer waste
- Thickness: 0.7 mm
- Accessories:

Sealing tape
Fixing clips
Overflow pipe
Siphon

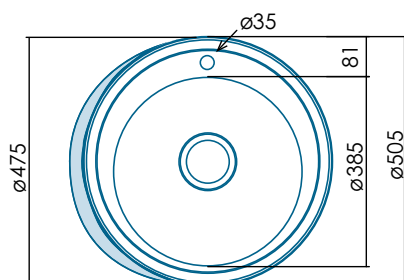

HIGH SPOUT

ACC 40


NEW

COD	EAN	FINISH
02625029	8422248376167	Steel



- Square bowl
- Suitable for 45 cm base unit
- Dimensions: 48 x 48 cm
- Bowl depth: 16.5 cm
- Sound-absorbing base
- AISI 304 18/8 stainless steel
- 3 1/2" basket strainer waste
- Thickness: 0.8 mm
- Accessories:

Sealing tape
Fixing clips
Overflow pipe
Siphon

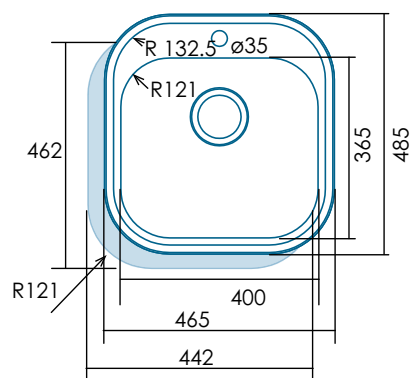

SINK



HIGH SPOUT


AGA

NEW

COD	EAN	FINISH
02502403	8422248376174	Chrome



- High-spout single-lever tap in brass
- Ceramic cartridge
- Cold-start opening
- 360° swivel spout
- Anti-limescale aerator with 5 l/min flow restrictor
- Chrome finish
- Stabilizing triangle
- Certified stainless steel flexible hoses M10x1x3/8"

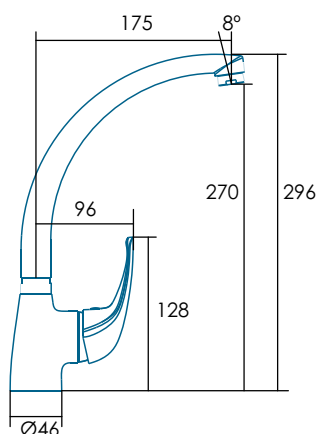

LOW SPOUT


AGB

NEW

COD	EAN	FINISH
02502404	8422248376181	Chrome



- Low-spout single-lever tap in brass
- Ceramic cartridge
- Cold-start opening
- 360° swivel spout
- Anti-limescale aerator with 5 l/min flow restrictor
- Chrome finish
- Stabilizing triangle
- Certified stainless steel flexible hoses M10x1x3/8"

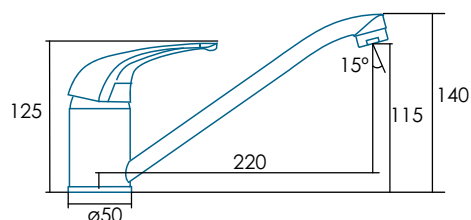



TECHNICAL INFORMATION

HOODS

Code	AAS 600	TALIA 901 X/A	TALIA 601 X/A
EAN	08000278	02029380	02029381
Model	8422248358712	8422248378086	8422248378093
Type	Surface	Box	Box
"Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564"			
AEC (Annual Energy consumption) (kWh/annum)	43.3	30.6	29.6
EEL class (Energy Efficiency Class)	A+	B	B
FDE (Fluid Dynamic Efficiency)	34.9	9.8	9.8
FDE class (Fluid Dynamic Efficiency Class)	A	E	E
LE (Lighting Efficiency) (lux/W)	-	44	70
LE class (Lighting Efficiency Class)	-	A	A
GFE (Grease Filtering Efficiency)	66.8	65.3	65.1
GFE Class (Grease Filtering Efficiency class)	D	D	D
Air flow at minimum speed (m3/h)	238	223	223
Air flow at maximum speed (m3/h)	491	301	301
Air flow at intensive speed (TURBO) (m3/h)	673	-	-
Sound Power Level at minimum speed (dB)	51	61	61
Sound Power Level at maximum speed (dB)	68	68	68
Sound Power Level at intensive speed (TURBO) (dB)	74	-	-
Po (Power Consumption in off mode) (W)	0.48	0	0
Ps (Power Consumption in standby) (W)	-	-	-
Integration directive EU 66/2014			
f (Time Increase Factor)	0.7	1.6	1.6
EEL (Energy Efficiency Index)	39.9	69.9	69
QBEP (Flow Rate at Best Efficiency Point) (m3/h)	331.3	136.5	133.9
PBEP (Static Pressure Difference at Best Efficiency Point) (Pa)	644	129	126
WBEP (Electric Power Input at Best Efficiency Point) (W)	169.6	49.9	48.1
WL (Nominal Power Consumption of Lighting system) (W)	-	2	2
EMIDDLE (Average Illumination of Lighting system on Cooking surface) (lux)	-	88.5	147
External Dimensions			
Width (mm)	590	900	600
Depth (mm)	520	450	450
Total max height(mm)	170	830	830
Total min height(mm)	170	450	450
Outlet Diameter (mm)	220x90	150	150
Characteristics			
Motor	SL1 BLDC	AC 65	AC 65
Extraction Levels	5+1	3	3
Maximum Power Consumption	165	65	65
Maximum Pressure	644	181.53	181.53
Intensive Speed (TURBO) Pressure	870	-	-
Control Type	Slider	Mechanic	Mechanic
Connectivity	-	-	-
Automatic removal	-	-	-
Automatic shut-down timer	●	-	-
Electronic Filter Saturation Indicator	●	-	-
Filter Type/ layers	Full Black Aluminium + plastic basket	Metallic	Metallic
Anti-grease Filter Number	1	3	2
Inner Shield	●	-	-
Glass damped open/closure	-	-	-
Air purification function	-	-	-
Air quality sensor	-	-	-
Anti-drip system	-	-	-
Lighting			
Light Type	-	CSLED	CSLED
Adjustable Intensity Lighting	-	-	-
Colour temperature	-	6500K	6500K
N° of Lamps	-	1	1
Installation			
Minimum height distance to a electric worktop hob (mm)	-	550	550
Minimum height distance to a gas worktop hob (mm)	-	650	650
Installation with Outlet tube to the exterior / Recirculating	BOTH	BOTH	BOTH
Easy Installation System	●	●	●
Electric Connection			
Total Rush Power (W)	7200	67	67
Rated Voltage (V)	220/240	220/240	220/240
Network Frequency (Hz)	50/60	50	50
Electrical Insulation Class	CLASS I	CLASS I	CLASS I
Plug	-	-	-
Accessories / ○ NOT INCLUDED ●INCLUDED			
Upper Decorative tube Extension	-	02800225 / ○	02800225 / ○
White Decorative Tube	-	-	-
Black Decorative Tube	-	-	-
Island Tube Enhancer	-	-	-
Check Valve	-	●	●
MAX PRO Metal Filter	-	-	-
Metal Filter	-	02800708 / ●	02800705 / ●
DUAL Filter (metal + active charcoal)	-	-	-
Active Charcoal Filter	-	301030600054 / ○	301030600054 / ○
Noiseless Flexible Duct	-	-	-
Top outlet motor cover	-	-	-
FCA kit without duct cover	-	-	-

	HELIA 901 X 02063379 8422248371681	HELIA 601 X 02061379 8422248372077	AIR 202 600 INOX 02034380 8422248377997	AIR 201 600 BLANCA 02034381 8422248378000	AIR 102 II 02013179 8422248109895	AIR 101 II 02011179 8422248109864
	Chimney	Chimney	Telescopic	Telescopic	Standard	Standard
	17.9	17.9	60.9	31.1	60	44.7
	A+	A+	C	C	D	C
	29.7	29.4	9.8	11.9	8.8	9.2
	A	A	E	E	E	E
	20	28	50	41.5	13.1	27.3
	B	A	A	A	D	B
	75.3	75.1	56.1	53.5	68	67.7
	C	C	E	F	D	D
	220	220	203.6	101.6	195	110
	610	610	387.6	213.3	320	195
	-	-	-	-	-	-
	50	50	57	46	60	56
	73	73	69	64	67	68
	-	-	-	-	-	-
	0	0	0	0	-	-
	-	-	-	-	-	-
	0.9	0.9	1.6	1.6	1.7	1.7
	41.5	41.4	84.1	70.2	88.8	82.2
	228.9	204.6	222.8	123.7	191.2	105.2
	222	247	162	176	136,9	209
	47.5	47.7	101.8	50.7	83	201
	3	3	2	2	11	5.5
	62.2	87.42	100	83	144	150
	900	600	600	600	600	600
	475	475	280	280	470	470
	960	960	176	176	112	112
	580	580	176	176	112	112
	150	150	120	120	120	120
	BLDC 110	BLDC 110	2x AC 60	AC 60	L1	L1N
	3	3	2	2	3	3
	110	110	120	62	50	65
	410.8	410.8	269.3	249.9	221	325
	-	-	-	-	-	-
	Mechanic	Mechanic	Rocker Switch	Rocker Switch	Slider	Slider
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	Metallic	Metallic	Metallic	Metallic	Aluminium Mesh	Aluminium Mesh
	3	2	2	2	1	1
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	CSLED	CSLED	CSLED	CSLED	LED E-14	LED E-14
	-	-	-	-	-	-
	6500K	6500K	6500K	6500K	-	-
	1	1	1	1	2	1
	550	550	550	550	550	550
	650	650	650	650	650	650
	BOTH	BOTH	BOTH	BOTH	BOTH	BOTH
	●	●	●	●	●	●
	112	112	122	62	111	70.5
	220/240	220/240	220/240	220/240	220-240	220-240
	50	50	50	50	50	50
	CLASS I	CLASS I	CLASE II	CLASE II	CLASS I	CLASS I
	-	-	-	-	-	-
	02800225 / O	02800225 / O	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
	●	●	●	●	02849002 / O	02849002 / O
	-	-	-	-	-	-
	02800708 / ●	02800705 / ●	02800218 + 02800219 / ●	02800218 + 02800219 / ●	02833162 / ●	02833162 / ●
	-	-	-	-	-	-
	301030600054 / O	301030600054 / O	02800959 / O	02800959 / O	02846762 / O	02846764 / O
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-

HOBS

Código	08000278	08074180	08063115	
EAN	8422248358712	8422248372374	8422248351416	
Model	AAS 600	AIT 4600 220-240V 50-60Hz	AIT 3602 220-240V 50-60Hz	
Type	Surface	Inducción	Induction	
Product fiche				
Cooking zones	4	4	3	
Right front zone: Diameter (mm)	160	160	-	
Right front zone: Power (kW)	1.2	1.2	-	
Right front zone: Booster (kW)	1.5	1.5	-	
Right front zone: Consumption (Wh/kg)	174.8	183.4	-	
Right rear zone: Diameter (mm)	210	180	280	
Right rear zone: Power (kW)	2.3	1.8	2.3	
Right rear zone: Booster (kW)	2.6	2.3	2.6	
Right rear zone: Consumption (Wh/kg)	177.7	180.8	180.8	
Central front zone: Diameter (mm)	-	-	-	
Central front zone: Power (kW)	-	-	-	
Central front zone: Booster (kW)	-	-	-	
Central front zone: Consumption (Wh/kg)	-	-	-	
Central rear zone: Diameter (mm)	-	-	-	
Central rear zone: Power (kW)	-	-	-	
Central rear zone: Booster (kW)	-	-	-	
Central rear zone: Consumption (Wh/kg)	-	-	-	
Front left zone: Diameter (mm)	160	180	210	
Front left zone: Power (kW)	1.2	1.8	2	
Front left zone: Booster (kW)	1.5	2.3	-	
Front left zone: Consumption (Wh/kg)	174.8	180.8	184.1	
Left rear zone: Diameter (mm)	180	160	160	
Left rear zone: Power (kW)	1.8	1.2	1.2	
Left rear zone: Booster (kW)	2.3	1.5	-	
Left rear zone: Consumption (Wh/kg)	174.8	195.4	181.7	
Energy consumption of the hob (Wh/kg)	181.3	185.3	182.2	
Dimensions				
Product width (mm)	590	590	590	
Product depth (mm)	520	520	520	
Product height (mm)	170	58	58	
Built-in height (mm)	560	560	560	
Built-in depth (mm)	490	490	490	
Ventilation slot (mm)	-	-	-	
Fixing system	Easy fix	Quick-Fix System	Quick-Fix System	
Minimum worktop thickness				
Finishing				
Colour	Black	Black	Black	
Aesthetic	Rounded	Rounded	Rounded	
Control				
Control type	Slider	Touch	Touch	
Power selection (+/-)	Centralizado	Centralized	Centralized	
Power levels	9 + Booster	9 + Booster	9 + Booster	
Connectivity	-	-	-	
Cooking functions by temperature	-	-	-	
Cooking functions	3	3	3	
Cooking zone division by power	-	-	-	
Pot displacement recognition	-	-	-	
Pasta/rice timer function	-	-	-	
Automatic start function	-	-	-	
Pan speed function	-	-	-	
Demo mode	●	-	-	
AUTO cooking function	●	-	-	
Memory function	●	-	-	
Timer	●	●	●	
Countdown alarm	●	●	●	
Pause function	●	●	●	
Power management	●	●	●	
Security				
Safety lock	●	●	●	
Residual heat indicator	●	●	●	
Automatic pan detection	●	●	●	
Automatic safety switch-off	●	●	●	
Protection against liquid spillage	●	●	●	
Electrical connection				
Nominal voltage (V)	220-240	220-240	220-240	
Mains frequency (Hz)	50-60	50-60	50-60	
Connection cable length cm	100	100	100	
Three-phase connection possible				
Max Product power (kW)	7.2	7	5.8	

	08076080 8422248372367 AIT 3601 220-240V 50-60Hz Induction	08040080 8422248372381 AVT 4601 Radiant	08063180 8422248372398 AVT 3600 Radiant	08040180 8422248372404 AVT 2300 Radiant
	3	4	3	2
	-	180	185	-
	-	1.8	1.8	-
	-	-	-	-
	-	191.3	195.4	-
	250	140	160	-
	1.8	1.2	1.2	-
	2.3	-	-	-
	181.5	194.1	185.4	-
	-	-	-	160
	-	-	-	1.2
	-	-	-	-
	-	-	-	190.5
	-	-	-	190
	-	-	-	2
	-	-	-	-
	-	-	-	181.3
	180	140	-	-
	1.8	1.2	-	-
	-	-	-	-
	183.4	187.7	-	-
	160	180	280	-
	1.5	1.8	2.4	-
	-	-	-	-
	181.7	183.4	193.5	-
	182.2	189.1	191.4	185.9
	590	590	590	290
	520	520	520	520
	58	47	47	47
	560	560	560	265
	490	490	490	495
	-	-	-	-
	Quick-Fix System	Quick-Fix System	Quick-Fix System	Quick-Fix System
	Black Rounded	Black Rounded	Black Rounded	Black Rounded
	Touch Centralized 9 + Booster	Touch Centralized 9	Touch Centralized 9	Touch Centralized 9
	-	-	-	-
	-	-	-	-
	3	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
	●	●	●	●
	●	●	●	●
	●	-	-	-
	●	-	-	-
	●	●	●	●
	●	●	●	●
	●	●	●	●
	●	●	●	●
	220-240	220-240	220-240	220-240
	50-60	50-60	50-60	50-60
	100	100	100	100
	5.3	6	5.4	3.2

OVENS

Code	07001406	07001408
EAN	8422248376211	8422248376242
Model	AMS 5001 X	AMM 5001 X
Type (Electric/Gas)	Electric	Electric
Product fiche		
Energy efficiency index (IEE conventional/multifunction)	94.2	94.2
Energy efficiency Class	A	A
Conventional mode energy consumption (according to EN 50304/2009) [kWh]	0.82	0.81
Multifunction mode energy consumption (according to EN 50304/2009) [kWh]	-	0.88
Number of cavities	1	1
Cavity volume (l)	76	73
Dimensions - External dimensions		
Appliance width [mm]	595	595
Appliance height [mm]	595	595
Appliance depth [mm]	555	555
Cavity width [mm]	460	483
Cavity height [mm]	451	417
Cavity depth [mm]	381	362
Characteristics		
Finishing	Black glass + Stainless Steel	Black glass + Stainless Steel
Door lock option	-	-
Tray levels	5	5
Fan	Axial	Axial
Number of lights	1	1
Controls		
Control type	Fix knobs	Fix knobs
Screen Technology	-	-
Working pilot light	●	●
Thermostat pilot light	●	●
Min. temperature [°C]	50	50
Cleaning		
Enamel	ETC Easy-To-Clean enamel	ETC Easy-To-Clean enamel
Type of cavity / lateral grill	Embossed	Chromed
Inner glass	Removable	Removable
Pyrolitic Cleaning	-	-
Min. Pyrolysis duration (min)	-	-
Max. Pyrolysis duration (min)	-	-
EasyClean Cleaning	Manual	Manual
Programs	6	8
Functions	5	8
Fast preheat	-	-
Inner light	●	●
Security		
Number of door glasses	3	3
Cooling fan	●	●
Security Thermostat	●	●
Security automatic disconnection	●	●
Automatic door block	-	-
Electrical connection		
Grill power [W]	1650+1100	1650+1100
Top heating element power [W]	1100	1100
Underfloor element Power [W]	1100	1100
Back element Power [W]	-	-
Total Power [kW]	2.8	2.8
Nominal voltage [V] / Mains frequency [Hz]	220-240 / 50	220-240 / 50
Light power [W]	25	25
Accessories		
Grill	1	1
Flat tray	-	-
Deep tray	1	1
Telescopic guides	-	-
Pizza Stone (optional)	-	-

MICROWAVE

Code	07510314
EAN	8422248376259
Model	AMW 2000G X
Type (Built in / free standing)	Built in
DIMENSIONS	
Appliance width [mm]	595
Appliance height [mm]	390
Appliance depth [mm]	308+20 FRAME
Cavity width [mm]	315
Cavity height [mm]	211
Cavity depth [mm]	296
Characteristics	
Finishing	Black glass+ Stainless steel
Door opening System	Push button
Cavity capacity [L]	20
Cavity construction type	White lacquer
Inside light	●
Opening door angle [degrees]	90
Noise level db[A]	63
Microwave ovens without turntable	-
Controls	
Control type	Mechanic
Display technology	-
Display Color	-
Electronic timer	-
Manual timer	Yes 30min
Start/Stop button	-
Timer [min]	30
Power selector	●
Function selector	-
Temperature selector	-
Working indicator	-
Weight selector	●
Number of programmes	9
N° of microwaves programs	5
N° of grill cooking programs	1
N° of grill+mw/ mw+turbo / grill+mw+turbo/grill+turbo cooking programs	3/-/-
Auto cook	-
Grill	●
Simultaneous grill + microwave	●
Convection fan	-
Defrosting, heating and cooking by food type	● / -
Memories	-
Quick start	-
Cleaning system	-
Safety	
Safety thermostat	●
Safety automatic disconnection	-
Child safety lock	-
Door temperature	65
N° of glasses in the door	1
Electrical connection	
Grill power [W]	800
Microwave power [W]	700
Convection power [W]	-
Rated power [W]	1080
Voltage [V]	220-240
Frequency [Hz]	50
Power cord length	1000
Plug type	Schuko
Accessories	
Rotatory removable glass	●
Diameter of glass dish [mm]	245
Built in frame	Included
Wall unit installation	●

DISHWASHER

Code	07200082
EAN	8422248376129
Model	ALV-6000 WH
Finish	White
Product fiche according to EU Regulation 2019/2022 - 2019/2017	
Rated capacity (ps)	12
Height (cm)	84,5
Width (cm)	59,8
Depth (cm)	60
Energy Efficiency Index (EEI)	55,9
Energy efficiency class	E
Cleaning performance index (IC)	1.13
Drying performance index (ID)	1.07
Energy consumption in kWh [per cycle], based on the ECO programme	0.923
Energy consumption in kWh [per 100 cycle], based on the ECO programme	92
Water consumption in litres [per cycle], based on the ECO programme	11
Duration of the eco programme (Tt) (h:min)	3:50
Tipo	Freestanding
Airborne acoustical noise emissions (dB(A))	52
Airborne acoustical noise emission class	D
Power consumption in off-mode (Po) (W)	0.49
Power consumption in standby mode (Psm) (W)	-
Delay start (W) (if applicable)	1
Networked standby (W) (if applicable)	-
Technical documentation (UE) 2019/2017	
Standard programme energy consumption (SPEC) (kWh/cycle)	1.65
Does standby mode include the display of information?	●
Power consumption in standby mode (Psm)	0.45
Power consumption in delay start (Pds) (if applicable) (W)	0.49
Duration of the Left-on Mode (Tl) (min) (EP)	15
Product dimenons	
Height min/max [mm]	845
Width [mm]	598
Depth [mm]	600
Adjustable legs	50
Cabinet and door dimensions	
Minimum cabinet height [mm]	-
Minimum cabinet width [mm]	-
Minimum cabinet depth [mm]	-
Max door height (built-in models) [mm]	-
Sliding door	-
Control panel	
Display / LED	-
Salt control pilot light	●
Rinse aid control pilot light	●
Time remaining indicator	-
Delay for starting operation	3/6/9h
Programs and functions	
Number of programs	4
Intensive[°C-min]	65 °C / 205 min
Normal [°C-min]	-
ECO [°C-min]	45 °C / 230 min
Express 90' [°C-min]	50 °C / 90 min
Glass [°C-min]	-
Rapid 30' [°C-min]	50°C / 30 min
Soak [min]	-
Automatic [°C-min]	-
Hygiene	-
Silence	-
Start / Pause function	●
Half load funtion	●
Extra drying function	-
Flex wash function (Alternative wash function)	-
Total Clean function (Strong wash function)	-
Equipment	
Upper basket with height regulation	-
Upper basket foldable support for cups	●
Upper/Lower basket foldable supports	-
Type of dispenser	Sliding
Slide&Go tray	-
Third tray	-
Additional specifications	
Motor	Standard
Automatic door open	-
Enabled for all in one detergent	●
Type of cavity	Stainless + PP
Safety	
Child lock	●
Triple security system	●
Power and water connection	
Voltage range [V]	220-240
Frequency [Hz]	50
Rated power [W]	1760-2100
Rated current [A]	8-8.75
Type of plug	Schuko
Power cord length [mm]	1500
Inlet water hose length [mm]	1500
Drain water hose length [mm]	1614

FRIDGE

Code	07800081
EAN	8422248376136
Model	AFC 1800 WH
Finish	White
Product fiche according to EU Regulation 2019/2016	
Category	7
Energy efficiency class	E
Energy consumption [kWh/year]	220
Refrigerator storage volume [l]	182
Freezer storage volume **** [l]	71
Star rating	4
Frost-free fridge	●
Frost-free freezer	●
Power cut safe [h]	9.5
Freezing capacity [kg/24h]	3.2
Climate class (2)	N/T
Noise emissions [dBA]	40
Installation type	Free standing
Dimmensions	
Height [mm]	1800
Width [mm]	540
Depth [mm]	600
Opening of the door	Right
Reversible doors	●
Wheels	-
External / Recessed handle	Recessed handle
Control	
Cooling type	TOTAL NO Frost
Control	Electronic
Display	-
Electronic refrigerator temperature regulation	●
Electronic freezer temperature regulation	●
Super cooling / Super freezing function	-
Holiday function	-
Winter-Summer function	-
Refrigerator equipment	
Number of door balconies	3
Number of glass shelves	4
Wine rack	-
Drawer for fruits and vegetables	1
Chiller for meat and fish	-
Metallic inner decoration	-
Number of egg tray - Egg capacity	1-6
Freezer equipment	
Number of drawers - closed drawers	3-2
Ice trays - Ice cube capacity	1-12
Illumination	
Fridge / Freezer lightning	● - ○
LED lightning	● - ○
Power and water connection	
Voltage range [V]	220-240
Frequency [Hz]	50
Rated power [W]	110
Rated current [A]	0.9
Type of plug	Schuko
Power cord length [mm]	1600

WASHING

Code	07900006
EAN	8422248376204
Model	AWM 6000 WH
Finish	White
Product fiche according to EU Regulation 2019/2023	
Model identifier	AWM 6000 WH
Rated capacity (kg)	6
Height (cm)	85
Width (cm)	60
Depth (cm)	46
Energy Efficiency Index (EEI)	86.8
Energy efficiency class (1)	E
Cleaning performance index	1.031
Rinsing effectiveness (g/kg)	4
Energy consumption in kWh [per cycle], based on the ECO programme (2)	0.703
Water consumption in litres [per cycle], based on the ECO programme (3)	36
Maximum temperature inside the treated textile (°C) - Rated Capacity	48
Maximum temperature inside the treated textile (°C) - Half Capacity	37
Maximum temperature inside the treated textile (°C) - Quarter Capacity	25
Remaining moisture content (%) - Rated capacity	59.79
Remaining moisture content (%) - Half capacity	60.7
Remaining moisture content (%) - Quarter capacity	61.04
Spin speed (rpm) - Rated capacity	1000
Spin speed (rpm) - Half capacity	1000
Spin speed (rpm) - Quarter capacity	1000
Spin-drying efficiency class (4)	B
Programme duration (h:min) - Rated capacity	3 : 18
Programme duration (h:min) - Half capacity	2 : 36
Programme duration (h:min) - Quarter capacity	2 : 36
Type	Free standing
Airborne acoustical noise emissions in the spinning phase (dBA)	76
Airborne acoustical noise emission class (spinning phase)	B
Off-mode (W)	0.49
Standby mode (W)	-
Delay start (W)	3.5
Product dimensions	
Height min/max [mm]	845/865
Width [mm]	595
Depth [mm]	460
Adjustable legs	●
Cabinet and door dimensions	
Minimum cabinet height [mm]	-
Minimum cabinet width [mm]	-
Minimum cabinet depth [mm]	-
General features	
Loading type	Front
Motor type	Standard
Hatch door diameter [cm]	30
Drum type	Stainless Steel
Filter system	Accessible
Foam reduction system	●
Load self adjustment	●
Self-dosing	-
Interior lighting	-
Recommended load indication	-
Foam recognition	-
Excess detergent	-
Control	
Control type	LED
Independent washing temperature selection	●
Independent spinning speed selection	●
Delay start [h]	12h
Start / Pause key	-
Countdown display	●
Washing cycle display	●
Connectivity	-

Programmes	
No. of washing machine/washing programmes	15/12
Cotton	●
Intensive cotton	-
Color cotton	●
Sintetic	-
Delicates	-
ECO	●
20°C	●
Wool	●
Hand wash	-
Quick [min]	-
Express 15	●
Mix	●
Sport clothes	●
Baby clothes	●
Customized	-
Jeans	-
Steam	-
Pillows	-
Anti-allergy	-
Automatic	-
Shirts	●
Curtains	-
Duvets	●
Hygiene	-
Linen	-
Nocturnal	-
Dark linen	●
Dry wash	-
Dry delicate	-
Intensive dry	-
Normal drying	-
Drum cleaning	●
Special functions	-
Prewash	●
Extra rinse	●
Anti-stain	-
Faster	-
Less ironing	-
Nocturno	-
Pause + load	●
Temperature selection	*/20/40/60/95
Spin speed selection	-/600/800/1000
Drying time selection	-
Drying setting	-
Safety	
Child-lock door	●
Anti-flooding system	●
Power and water connection	
Voltage range [V]	220-240
Frecuency [Hz]	50
Rated power [W]	1.800
Rated current [A]	-
Type of plug	Schuko
Power cord length [cm]	150
Inlet water hose length [cm]	150
Drain water hose length [cm]	150

SINKS

Code	02625028	02602101	02625029
EAN	8422248376143	8422248376150	8422248376167
Model	ACE 34R	ARC 38	ACC 40
DIMENSIONS			
Cutout dimension (width x lenght) [mm]	740x415	460x460	Ø465
Dimensions (width x lenght x depth) [mm]	760x435x150	480x480x165	485x485x160
GENERAL FEATURES			
Type of sink	Built-in countertop	Built-in countertop	Built-in countertop
Material	Stainless steel 304	Stainless steel 304	Stainless steel 304
Steel thickness [mm]	0,5	0,8	0,7
Colour	Steel	Steel	Steel
BOWL AND DRAINING RACK DETAILS			
Bowl quantity	1	1	1
Bowl form	Square	Square	Round
Draining rack	Yes	-	-
Draining rack quantity	1	-	-
Draining rack form	Square	-	-
Draining rack position	Left	-	-
Tap hole	-	Yes	Yes
Water repellent	-	-	-
Waste filter	-	-	-
Waterfall curtain	-	-	-
Water temperature display	-	-	-
LED lighting	-	-	-
Glasswasher	-	-	-
ACCESSORIES			
Drainpipe type	Round 3 1/2"	Round 3 1/2"	Round 3 1/2"
Drainpipe quantity	1	1	1
Overflow tube	Yes	Yes	Yes
Soap dispenser	-	-	-
Cutting board	-	-	-
Drainer	-	-	-

TAPS

Code	02502403	02502404
EAN	8422248376174	8422248376181
Model	AGA	AGB
Dimensions (diameter, lenght) of spout braided hose [", cm]	3/8, 40	3/8, 40
Product dimensions (height x width x depth) [mm]	296x206x48	140x250x50
Base diameter	48	50
GENERAL FEATURES		
Water tap type	Single-lever	Single-lever
Material	Brass	Brass
Material of handle	Cast	Cast
Material of spout braided hose	Stainless steel 304	Stainless steel 304
Finish style	Chrome	Chrome
Installation place	Sink, cooktop	Sink, cooktop
SPOUT AND CONTROL DETAILS		
Spout type	Long	Short
Spout form	Curved	Line
Removable spout	No	No
Rotatory spout	Yes / 360°	Yes / 360°
Airy spout	Yes	Yes
Antiscale areator	Yes	Yes
Shower function	No	No
Flow limiter 5 litre/minute	Yes	Yes
Lead Free	Yes	Yes
Cold start	Yes	Yes
Control type	Handle	Handle
ACCESSORIES		
Cartridge type	Ceramic discs	Ceramic discs
Easy Installation	Yes	Yes
Flexible M10x1x3/8" x 360mm INox certified instalation hose	Yes	Yes

Apelson

Apelson

CATA ELECTRODOMÉSTICOS S.L.U.

Tlf: +34 938 594 100.- Fax +34 938 594 101.

www.cata.com - www.edesa.com - www.cnagroup.es - cna@cnagroup.es

Headquarters: c/ Anabel Segura, 11, Edif. A, 3a pl. 28108. Alcobendas (Madrid. Spain)

Factory: c/ del Ter, 2, Apdo. 9. 08570. Torelló (Barcelona. Spain)

CNA
group

cata

edesa

NODOR

Apelson